


**RFT**  
**SY346/05 ... SY346/10 – SY347/05 ... SY347/10**

Schnelle Silizium- Gleichrichterdioden im Kunststoffgehäuse

Typ	$U_{RRM}$ (V)	$U_{RSM}^{1)}$ (V)	$I_{F(AV)}$ (A)	$I_{FRM}$ (A)	$I_{FSM}$ (A)
SY346/05	50	35	0,81	$\leq 8$	$\leq 40$
1	100	70	0,81		
2	200	140	0,81		
4	400	280	0,74		
6	600	420	0,68		
8	800	560	0,63		
10	1000	700	0,59		
SY347/05	50	35	0,73		
1	100	70	0,73		
2	200	140	0,73		
4	400	280	0,67		
6	600	420	0,61		
8	800	560	0,57		
10	1000	700	0,53		

<sup>1)</sup> empfohlener Wert

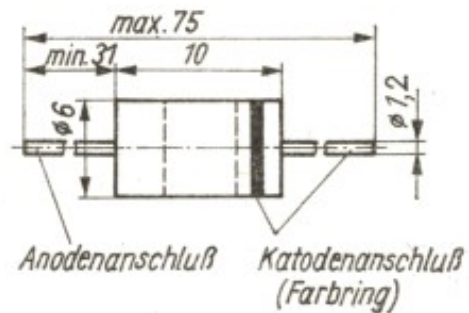

**RFT**  
**SY346/05 ... SY346/10 – SY347/05 ... SY347/10**

---

Quelle: Aktive elektronische Bauelemente – 1985

[www.semicon-data.de](http://www.semicon-data.de)